

# TREKKER SUSPENSION ADJUSTMENT


## STEP 1

Remove the bolt at the frame with a 5 mm Allen Wrench



## STEP 2

Remove the 2 Bolts at the top of the Shock with 2 5mm Allen Wrenches

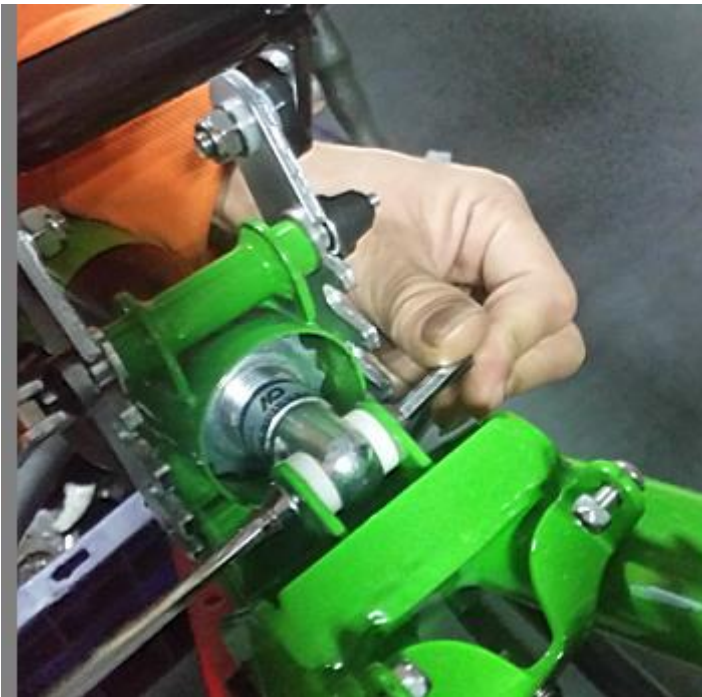

### STEP 3

Remove the Shock



### STEP 4

Put a 5 mm Allen Wrench in the hole, hold the shock and rotate the shaft- Clockwise  
Makes it stiffer, counterclockwise makes it softer.



## STEP 5

After adjustment slide the Shock back into the frame



## STEP 6

Replace the bolt at the frame and tighten



STEP 7

Replace the screws at the top of the shock and tighten.

